

Data sheet

DV A

PRODUCT DESCRIPTION

Pneumatic diverter for direction change.
Direction selection based on the signal.



MAIN CHARACTERISTICS

- Cadences up to 120 ppm
- 1 motorized closed loop belt from 500 to 1000 mm width
- Brushless motor and drive boards, speed up to 70 m/min
- Working temperature: from 0°C to +40°C
- Power supply: 230 Vac (Hz 50/60)
- Maximum power: 0.75 kW
- Structure and carpentry in aluminum and steel
- Height of belt from the ground: 850 +/- 50 mm
- Machine management via PLC
- Mechanical adjustments of blades

POSSIBLE APPLICATIONS:


- Selection of output lines based on signals from checkweighers, metal detectors, barcode readers, vision systems
- Balancing of the production flow on the downstream machines
- Connection between production machines of different capacities

OPTIONS

- Incoming cadence belts



LAYOUT

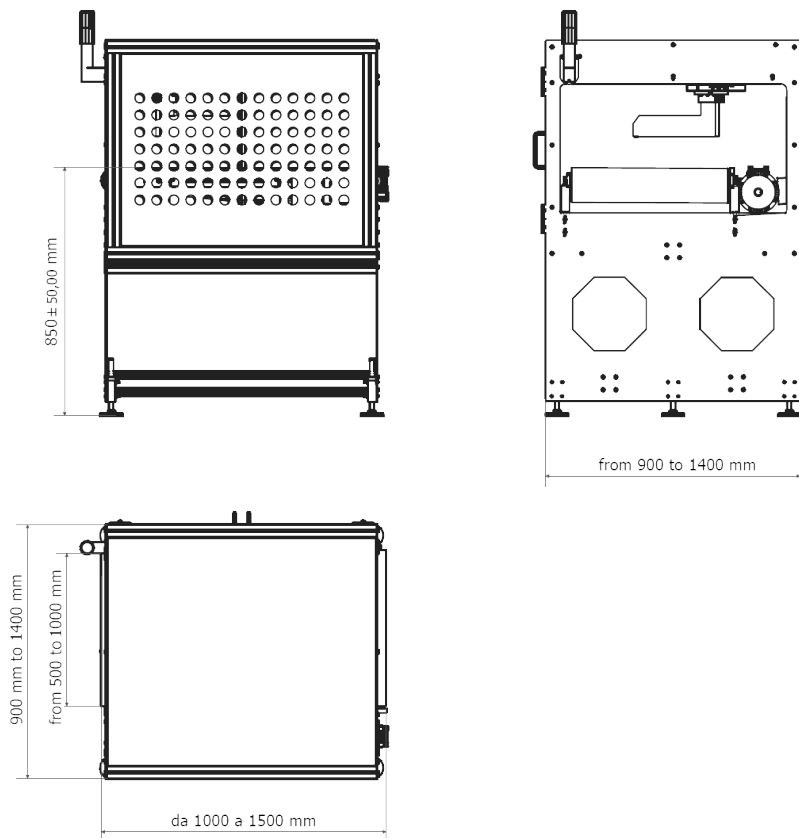



R.S. Bilance S.r.l.
Via Rinaudo, 19, Valcorrente - 95032 Belpasso CT
Tel. +39 095 3523283
commerciale@rsbilance.com
www.rsbilance.com