

# NT






### Main features

- PU conveyor belt.
- Brushless motor and AN drive board.
- Variable speed adjustment from 10 m/min to 75 m/min.
- Power supply: 230 V (Hz 50/60).
- Maximum power: 300 W.
- Structure and carpentry belt in stainless steel and anodized aluminum.
- Transport from 1 g to 30 kg.

### Dimensions

<b>Series 140 useful belt dimensions [mm]</b>	<b>Series 185 useful belt dimensions [mm]</b>	<b>Series 230 useful belt dimensions [mm]</b>	<b>Series 275 useful belt dimensions [mm]</b>	<b>Series 320 useful belt dimensions [mm]</b>
-	-	230x750	275x750	320x750
-	-	230x1000	275x1000	320x1000
-	-	230x1200	275x1200	320x1200
140x1370	-	-	-	-
-	-	230x1400	275x1400	320x1400
-	185x1600	230x1600	275x1600	320x1600
-	-	230x1700	-	-
-	185x1800	-	-	-
-	185x2000	-	-	-

# Layout

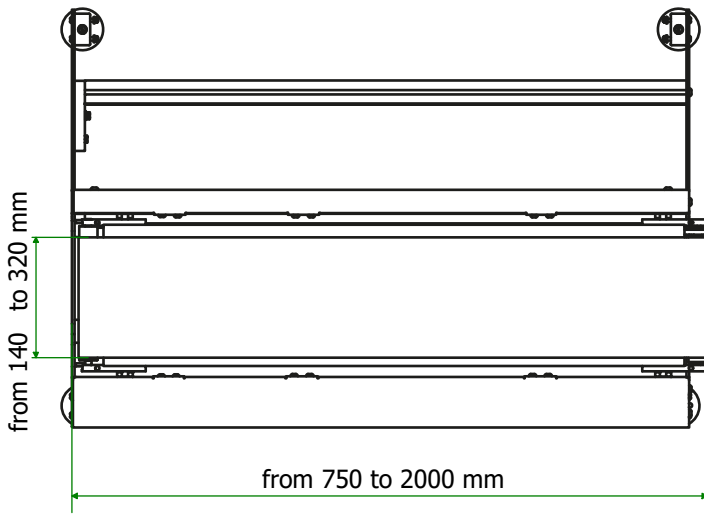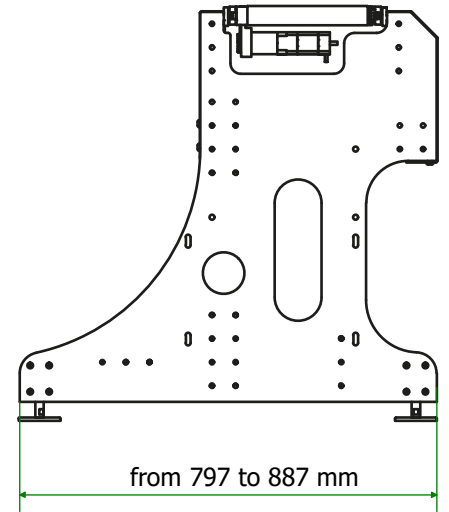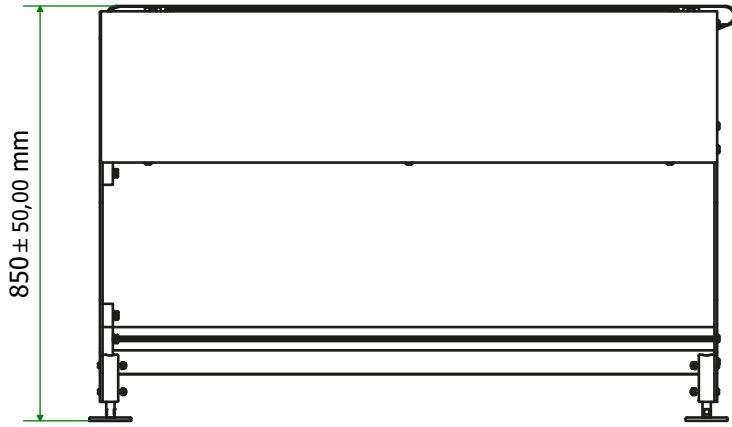

# NT

**MODULAR AND INTEGRABLE**

**REDUCED MAINTENANCE COSTS**

**SELF-DIAGNOSTIC**

**CONNECTIVITY AND DATA SHARING WITH OTHER SOFTWARE**

**REMOTE ASSISTANCE**



 TECHNOLOGY for Your Business

R.S. Bilance S.r.l.  
Via Rinaudo, 19, Valcorrente - 95032 Belpasso CT  
Tel. +39 095 352328a3  
commerciale@rsbilance.com  
www.rsbilance.com

