


Data sheet

TMS ML

PRODUCT DESCRIPTION

Multispectrum metal detector on elevator belt.

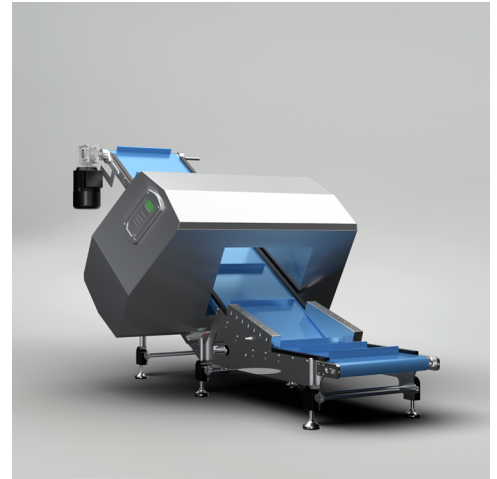

MAIN FEATURES


- Three-phase AC and inverter motors, speed up to 40 m/min
- Working temperature: from 0°C to +40°C
- Power supply: 230 Vac / 380 Vac (Hz 50/60)
- Maximum power: 800 W (with brushless motor)
- Structure and carpentry in aluminum and stainless steel
- Variable belt height according to request
- Control Power Box available according to Standards UL 508A and CSA-C22.2 No. 14-05
- Light column with LED technology

PROBES:



- Superior detection capability of magnetic and non-magnetic metallic contaminants including stainless steels
- Effective compensation of the effect produced
- Complies with FDA 21 CFR Part 11: Safety; Integrity; Data traceability
- Structure in AISI 316L stainless steel and EU, FDA compliant food-grade plastic materials
- Superior construction can withstand high pressure washdowns
- High sensitivity to all magnetic and non-magnetic metals including stainless steels
- Multi-frequency technology for maximum sensitivity to changes in the Product Effect
- High immunity to environmental disturbances
- Structure and components in AISI 316L stainless steel with IP65 protection rating
- 250 storable products, selectable from local programming or network software
- 1000 archiveable events
- 4x20 character alphanumeric display
- Local programming: 4 keys (3 with dual function)

OPTIONS

- Piston ejector, arm or pneumatic blow
- Collection basket in stainless steel and plastic
- Overflow photocell
- Continuous waste photocell
- Input product guides

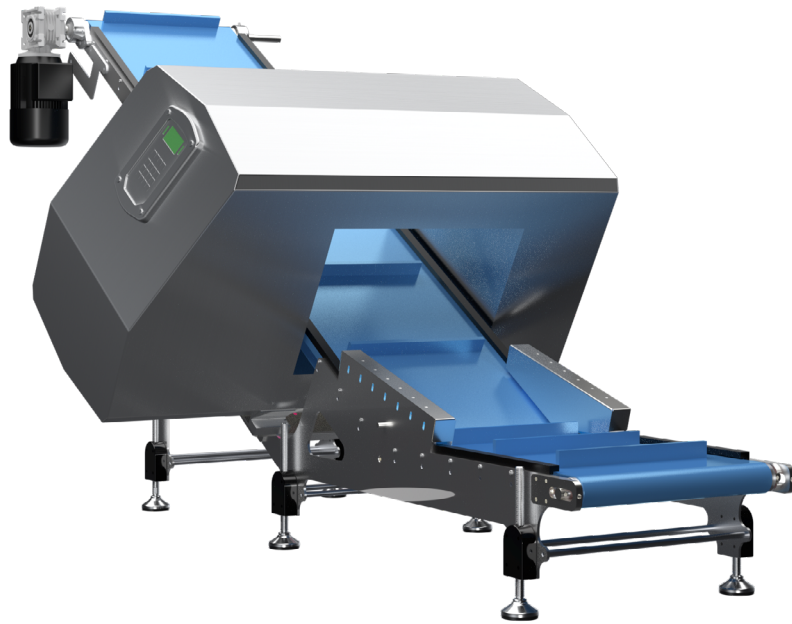

LAYOUT

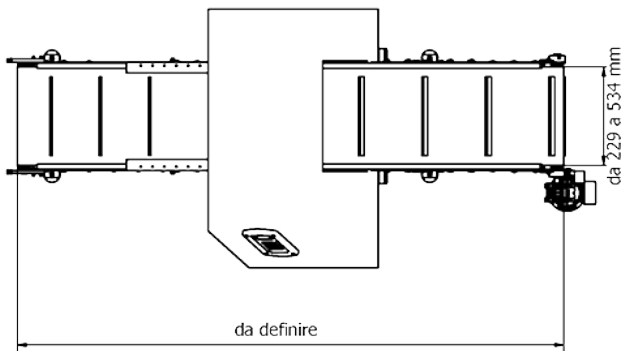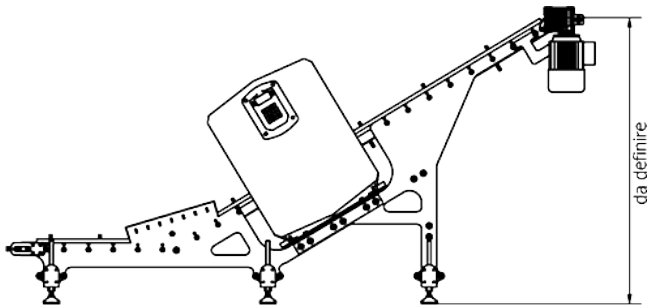



R.S. Bilance S.r.l.
Via Rinaudo, 19, Valcorrente - 95032 Belpasso CT
Tel. +39 095 3523283
commerciale@rsbilance.com
www.rsbilance.com