


Data sheet

PI

PRODUCT DESCRIPTION

Stainless steel electronic weighing platform with four load cells.
Standard four-cell version approved.

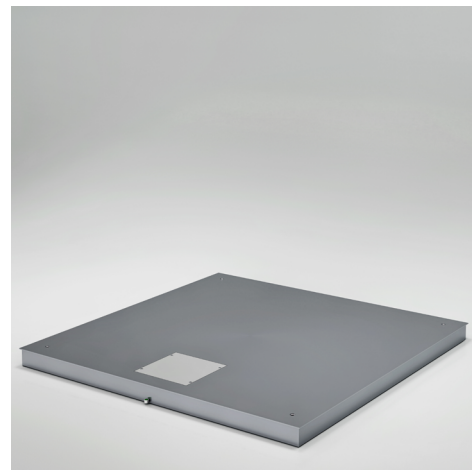

MAIN FEATURES


- Operation with four approved “single point” load cells in stainless steel, according to OIML R60 standards with protection from dust and humidity and according to IP67 standards
- AISI304 stainless steel tubular load-bearing structure and loading surface, IP67 junction box
- Adjustable anti-shock articulated stainless steel feet and level bubble
- Max power supply: 15 Vdc
- Hermetic junction box and cable wiring with IP67 compliant protective sheaths, 5 m 6-pole shielded cable for display connection complete with connectors

OPTIONS

- Load cell 6000 divisions
- Indicator holder column
- Cable length up to 20 m

DIMENSIONS

DIMENSIONS LxPxH (mm)	CAPACITY MAX (kg)	DIVISION STANDARD (g)	DIVISION CE-M (g)	DIVISION CE-M2 (g)
1000x1000x128	300	50	100	-
1000x1000x128	600	100	200	100-200
1000x1000x128	1500	200	500	200-500
1000x1250x128	300	50	100	-
1000x1250x128	600	100	200	100-200
1000x1250x128	1500	200	500	200-500
1250x1250x128	300	50	100	-
1250x1250x128	600	10	200	100-200
1250x1250x128	1500	200	500	200-500
1250x1500x128	600	100	200	100-200
1250x1500x128	1500	200	500	200-500
1250x1500x128	3000	500	1000	500-1000
1500x1500x128	600	100	200	100-200
1500x1500x128	1500	200	500	200-500
1500x1500x128	3000	500	1000	500-1000

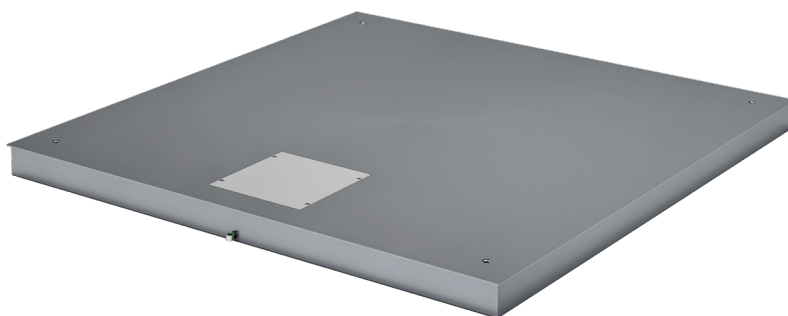

LAYOUT

